



TuFF : Extender

++



BS EN131
Professional
Licence No.
KM34154

SPECIFICATION

INDUSTRIAL HEAVY DUTY ALUMINIUM EXTENSION LADDERS (20% MORE DURABLE*)

SUPERSEDES THE LATEST STANDARDS TO OFFER THE BEST DURABILITY...

- + *Stress tested by BSI to 20% higher loads than EN131 requires to give Class 1 durability
- + Meets new improved strength & slip-tests in BS EN131-2:2010 + A2:2017
- + Stabiliser comes as standard on all ladders that extend beyond 3m for maximum safety.

UNIQUE TuFF RUNGS GIVE INDUSTRY LEADING STRENGTH & DURABILITY...

- + Heavy Duty 35mm serrated D - rungs with **4-way crimp & swage** design for maximum durability and comfort when working at height
- + Rungs orientated flat when erected at correct climbing angle to give stable standing surface.

BRITISH DESIGN FOR MAXIMUM SAFETY, COMFORT & DURABILITY...

- + Deep serrated rubber feet for maximum grip on all surfaces
- + Heavy duty galvanised steel locking catch standard on all extension ladders
- + Wall wheels fitted as standard for all ladders above 6m extended length
All sizes come with pre-drilled holes so wheels can be retrofitted.
Add SKU "M7WALL" to add a wheel kit
- + 10 Year Manufacturer's Warranty
- + Available as single, double and triple section extending up to 10m high.



**WHY LFI?
MY WORK.
MY SAFETY.
MY LADDER.**




KNOW YOUR LADDER

SINGLE SECTION



BS EN131
Professional
Licence No.
KM34154

SPECIFICATION

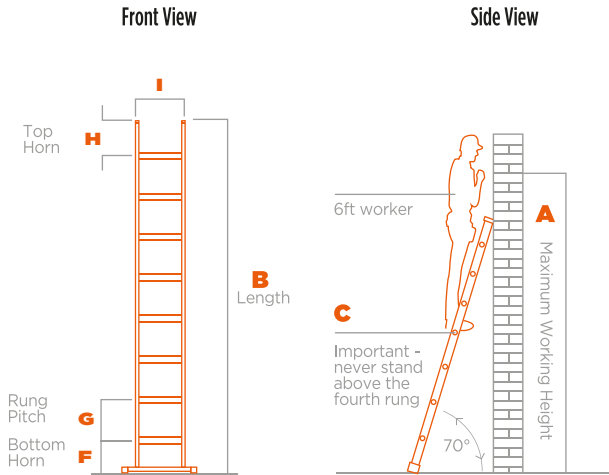


SINGLE LADDERS

Product SKU	No. of Rungs	A Max Working Height**	B Length	C Max Standing Height*	Weight (kg)
H9SS25	9	3.0	2.5	1.4	6.4
H9SS30	11	3.5	3.0	1.9	7.5
H9SS35	13	3.9	3.5	2.3	8.6
H9SS40	15	4.4	4.0	2.8	10.6
H9SS45	17	4.9	4.5	3.3	11.8
H9SS50	19	5.4	5.0	3.8	12.9
H9SS55	21	5.8	5.5	4.2	14.2

*Max Standing height is on the 4th rung down.
**Max Working height is calculated as Max Standing height + 1.6m

DOUBLE & TRIPLE SECTION

DOUBLE EXTENSION LADDERS

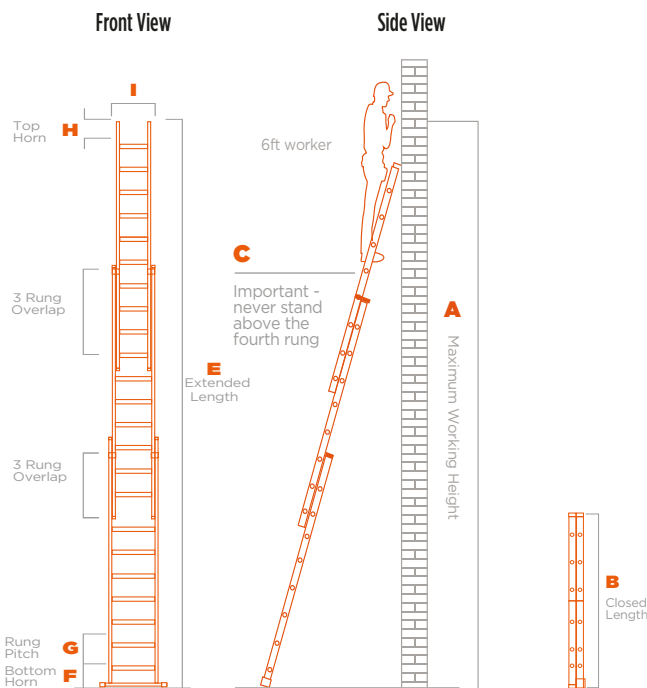

Product SKU	No. of Rungs	A Max Working Height**	B Closed Length	C Max Standing Height*	D Depth	E Extended Length	Weight (kg)
H9DP25	2x9	4.4	2.5	2.8	0.15	4.0	12.1
H9DP30	2x11	5.4	3.0	3.8	0.15	5.0	15.5
H9DP35	2x13	6.3	3.5	4.7	0.15	6.0	18.0
H9DP40	2x15	7.2	4.0	5.6	0.17	7.0	23.7
H9DP45	2x17	8.2	4.5	6.6	0.17	8.0	28.9
H9DP50	2x19	9.1	5.0	7.5	0.17	9.0	31.9
H9DP55	2x21	10.1	5.5	8.5	0.17	10.0	34.7

TRIPLE EXTENSION LADDERS

Product SKU	No. of Rungs	A Max Working Height**	B Closed Length	C Max Standing Height*	D Depth	E Extended Length	Weight (kg)
H9TP25	3x9	5.8	2.5	4.2	0.23	5.5	23.4
H9TP30	3x11	7.2	3.0	5.6	0.23	7.0	27.5
H9TP35	3x13	8.6	3.5	7.0	0.24	8.5	34.6
H9TP40	3x15	10.1	4.0	8.5	0.24	10.0	39.3

COMMON DIMENSIONS

F Bottom Horn	G Rung Pitch	H Top Horn	I Top Section Outside Width	J Middle Section Outside Width
0.26	0.25	0.27	0.34	0.41

Stabiliser Length (K) = 1.0m (up to 5.0m extended length)
= 1.2m (>5.0m extended length)

ALL DIMENSIONS IN METRES

Have an enquiry?

Call us on 01531 820541 or
email info@lfi-ladders.co.uk

britishladders.co.uk

