

## INDUSTRIAL HEAVY DUTY TIMBER POLE LADDERS

### TRADITIONAL MATERIALS STILL GIVING THE BEST PERFORMANCE...

- + **Speciality product for use in Scaffolding only.**  
Ladder must be tied off as per Work at Height regulations.
- + Ideal for **TuFF** industrial environments, meets strength requirements of BS2037 Class 1
- + Rated to a maximum load and duty rating of 150kgs.



### SUSTAINABLY SOURCED SCANDINAVIAN SPRUCE & EASTERN EUROPEAN BIRCH...

- + Hardwood rungs, tested to over 300kgs for maximum robustness.

### BRITISH DESIGN FOR MAXIMUM SAFETY, COMFORT & DURABILITY...


- + Handmade using the same traditional methods used by **LFI** for over 70 years
- + Steel tie-roads under each rung make a rigid and durable structure
- + 10 Year Manufacturer's Warranty.

AVAILABLE  
UP TO  
**6m**



**WHY LFI?  
MY WORK.  
MY SAFETY.  
MY LADDER.**

**TIMBER POLE LADDER**

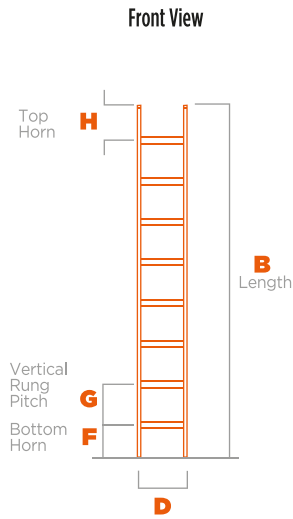


Product SKU	Treads /Rungs	<b>A</b> Max Working Height**	<b>B</b> Length	<b>C</b> Max Standing Height*	Weight (Kg)
A7PT30	11	3.5	3.0	1.9	8.0
A7PT40	15	4.5	4.0	2.9	12.0
A7PT50	19	5.4	5.0	3.8	16.0
A7PT60	23	6.2	5.9	4.8	20.0

\*Max Standing height is on the 4th rung down.  
 \*\*Max Working height is calculated as Max Standing height + 1.6m

**OTHER DIMENSIONS**

<b>D</b> Bottom Width	<b>F</b> Bottom Horn	<b>G</b> Rung Pitch	<b>H</b> Top Horn
0.36	0.23	0.25	0.14

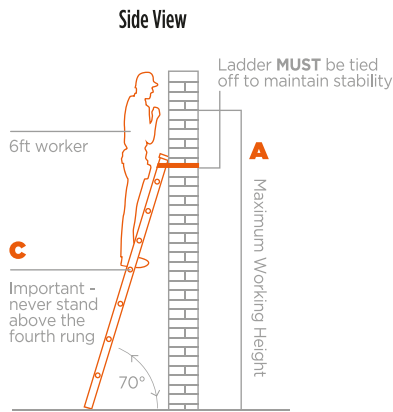

All dimensions in metres

**Have an enquiry?**  
 Call us on 01531 820541 or  
 email [info@lfi-ladders.co.uk](mailto:info@lfi-ladders.co.uk)

